

Liquid Level Controller

SSRC-04



SSRC-04 is used for controlling liquid levels in wells and liquid tanks at industrial sites. Precision (resistivity/impedance between electrodes) can be adjusted between 5 and 50 k Ω for different liquids.



PRODUCT SELECTION TABLE

Product Code

5-50 k Ω Adjustable
Small Electrode
Large Electrode
Pcs / Box


Product Code	Description	5-50 k Ω Adjustable	Small Electrode	Large Electrode	Pcs / Box
SSRC-04	Liquid Level Controller	●			16
LLS-01	Liquid Level Electrode		●		100
LLS-02	Liquid Level Electrode			●	100

Δ Liquid level electrodes cannot be used with inflammable and corrosive liquids and food products. The liquids that will be controlled for their levels must have electrical conductivity.


SPECIFICATIONS

	SSRC-04
ENCLOSURE	
Dimensions	Pk28
Protection Class	IP20
Weight	0,25kg/pcs
SUPPLY	
Operating Voltage	230 VAC \pm 10%, 400 VAC \pm 10%
Operating Frequency	50/60 Hz
Operating Range	(0,9-1,1) \times Un
Sensitivity	5-50k Ω adjustable
Warning Light	Front panel LED
OUTPUT	
Contact Output	1CO 8A 2000 VA
AMBIENT CONDITION	
Ambient Temperature, Humidity	-5 / +50 $^{\circ}$ C; 85 %
CONNECTIONS	
Mounting	Rail mounting; terminal with screw
Connection Types	Single Phase 2 Wires

Connection Diagram

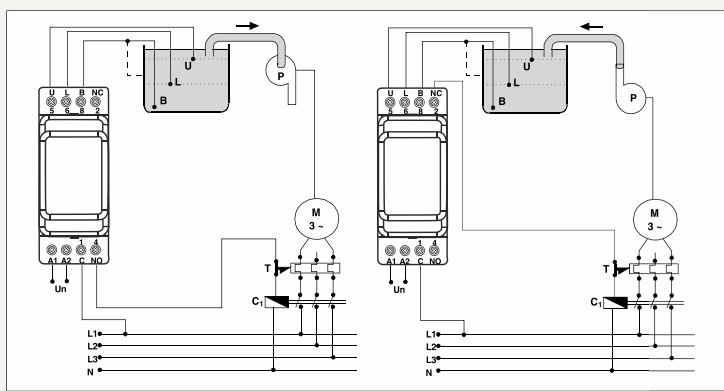

Dimensions

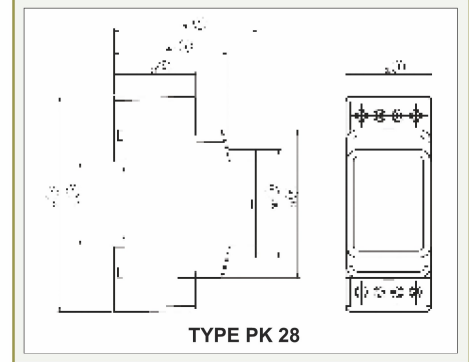

Connection diagrams are given for reference. Please always check the latest user manual given with product or download from www.entes.com.tr

