


Surge Protection Device

SPD Series

NEW

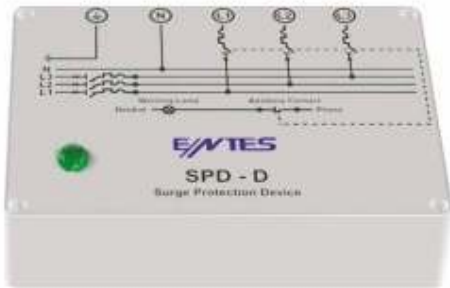

SPD device absorbs high energy surge voltages where they threaten sensitive devices and prevents them from being damaged. SPD device provides operation continuity. Also it can reduce repair costs.

	SPD-D	SPD-S
U_c	440 V~ (+10%) (L-L) 45 – 65 Hz	690 V~ (+10%) (L-L) 45 – 65 Hz
I_{max}	40 kA	40 kA
I_n	20 kA	20 kA
U_p	1,3 kV	1,3 kV
Protection	IP 20	IP 20
Dimension (mm)	171*121*80	171*121*80
Weight (gr)	746	634
Operation Temperature (°C)	-10...55 °C	-10...55 °C
Storage Temperature (°C)	-10...70 °C	-10...70 °C
Box piece	1	1

Power Factor Correction

Connection Diagram

