



Manufactures Low Voltage Switchgears
 All Types of Micro Switches, Limit Switches & Foot Switches

PRECISION LIMIT SWITCH



- Features**
- Compiling with IEC 60947-5-1
 - Silver Contact
 - Rugged & Highly Reliable design
 - Quick make & break action
 - DMC Molding



Technical Specification


Rating : 10A / 500 VAC
0.5A / 230 VDC

Contact : SPDT-DB, DPDT-DB

Body Material : DMC

Contact Material : Silver Cadmium Oxide

Terminal : Brass

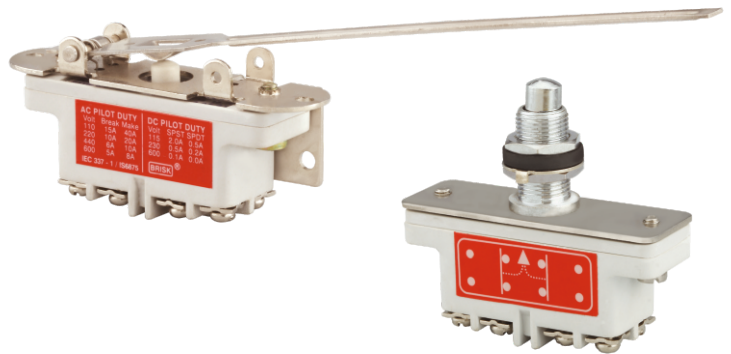

Actuators	Order Code	
	SPDT-DB	DPDT-DB
Without Operator	BPS-001	BPS-002
Top Push Button Operator	BPS-101	BPS-201
Top Push Roller Operator (Cross)	BPS-102	BPS-202
Top Push Roller Operator (Across)	BPS-103	BPS-203
Six inch Lever Operator (right hand mounting)	BPS-104	BPS-204
Six inch Lever Operator (left hand mounting)	BPS-105	BPS-205
Roller Lever Operator (right hand mounting)	BPS-106	BPS-206
Roller Lever Operator (left hand mounting)	BPS-107	BPS-207

MINIATURE LIMIT SWITCHES

Technical Specification

Rating : 10A / 125, 250, 480 VAC
0.8A / 125 VDC

Contact : DPDT-CO

Body Material : Aluminium pressure die casting

Contact Material : Silver Cadmium Oxide

Terminal : Brass

Actuators	Order Code	
	Normal	Snap
Top Push Rod	BML-P	BML-PS
Top Push Roller	BML-R	BML-RS
Roller Lever	BML-RL	BML-RLS



STANDARD LIMIT SWITCHES

Technical Specification

Rating : 10A / 125, 250 or 480VAC
0.8A / 125 VDC, 0.4A / 250 VDC

Contact : DPDT-CO

Body Material : Aluminium pressure diecasting

Contact Material : Silver Cadmium Oxide

Terminal : Brass

Actuators	Ordering Code	
	Normal	Snap
Std. Aluminium Housing (with roller lever)	LSR	LSRS
Std. Aluminium Housing (with push rod actuator)	LSP	LSPS
Oil Tight Aluminium Housing (with roller lever)	LSR-O	LSRS-O
Oil Tight Aluminium Housing (with push rod actuator)	LSP-O	LSPS-O

